


10		9		8		7		6		5		4		3		2		19125	
LOOSE_P TEECE		TAPE MOUNTED				DIMENSIONS										FINISH			
MATERIAL NUMBER	ENGINEERING NUMBER	MATERIAL NUMBER	ENGINEERING NUMBER	STUD SIZE	S ±.005	W MAX	C MIN	ID MIN	MWID	B REF	L MAX	H REF	T REF	INSULATION COLOR					
191250003	A-515-06	191250004	A-515-06T	6	.146/3.71	.301/7.6	.207/5.3	.054/1.37	.138/3.51	.536/13.61	.927/23.55	.08/2.0	.031/0.79	RED					
191250005	A-515-08	191250006	A-515-08T	8	.173/4.39	.301/7.6	.207/5.3	.054/1.37	.138/3.51	.536/13.61	.927/23.55	.08/2.0	.031/0.79	RED					
191250007	A-515-10	191250008	A-515-10T	10	.198/5.03	.301/7.6	.207/5.3	.054/1.37	.138/3.51	.536/13.61	.927/23.55	.08/2.0	.031/0.79	RED					
191250033	B-516-06	191250034	B-516-06T	6	.146/3.71	.301/7.6	.209/5.3	.081/2.06	.165/4.19	.536/13.61	.936/23.77	.08/2.0	.031/0.79	BLUE					
191250035	B-516-08	191250036	B-516-08T	8	.173/4.39	.301/7.6	.209/5.3	.081/2.06	.165/4.19	.536/13.61	.936/23.77	.08/2.0	.031/0.79	BLUE					
191250037	B-516-10	191250038	B-516-10T	10	.198/5.03	.301/7.6	.209/5.3	.081/2.06	.165/4.19	.536/13.61	.936/23.77	.08/2.0	.031/0.79	BLUE					
191250074	C-517-06	191250075	C-517-06T	6	.146/3.71	.345/8.8 (A)	.270/6.85 (A)	.128/3.25	.225/5.71	.669/16.99	1.165/29.6 (A)	.10/2.5	.040/1.02	YELLOW					
191250076	C-517-08	191250077	C-517-08T	8	.173/4.39	.385/9.8	.270/6.85 (A)	.128/3.25	.225/5.71	.669/16.99	1.165/29.6 (A)	.10/2.5	.040/1.02	YELLOW					
191250078	C-517-10	191250079	C-517-10T	10	.209/5.3 (A)	.385/9.8	.270/6.85 (A)	.128/3.25	.225/5.71	.669/16.99	1.165/29.6 (A)	.10/2.5	.040/1.02	YELLOW					

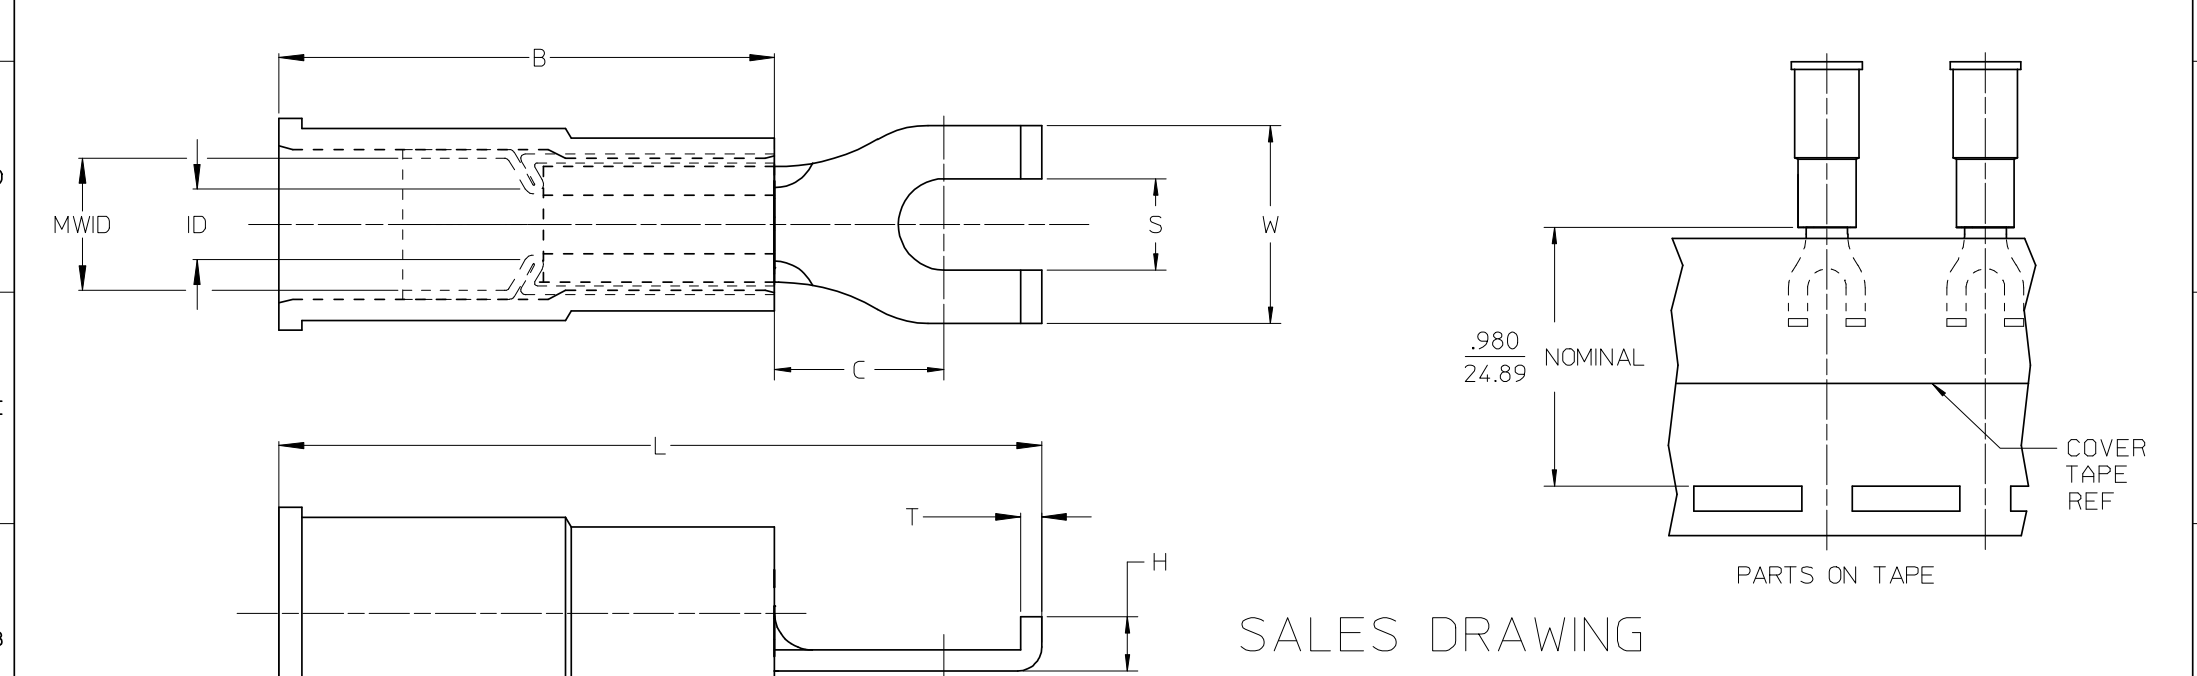

- NOTES:
1. MATERIAL: COPPER
  2. PLATING: ELECTRO-TIN
  3. MWID = MAXIMUM WIRE INSULATION DIAMETER
  4. PART IS RoHS COMPLIANT

<b>STANDARDIZE</b> EIC NO: ETC2008-0012 DRWN: RSTONE 2007/11/26 CHKD: JMACNEIL 2007/11/26 APPR: JMACNEIL 2007/12/05 REV A	QUALITY SYMBOLS ▽=0 ∇=0	GENERAL TOLERANCES (UNLESS SPECIFIED) <table border="1"> <thead> <tr> <th></th> <th>mm</th> <th>INCH</th> </tr> </thead> <tbody> <tr> <td>4 PLACES</td> <td>±---</td> <td>±---</td> </tr> <tr> <td>3 PLACES</td> <td>±---</td> <td>±.005</td> </tr> <tr> <td>2 PLACES</td> <td>±0.13</td> <td>±.01</td> </tr> <tr> <td>1 PLACE</td> <td>±0.25</td> <td>±---</td> </tr> </tbody> </table>		mm	INCH	4 PLACES	±---	±---	3 PLACES	±---	±.005	2 PLACES	±0.13	±.01	1 PLACE	±0.25	±---	DIMENSION STYLE <b>IN/MM</b>	SCALE ---	DESIGN UNITS <b>INCH</b>	THIRD ANGLE PROJECTION
		mm	INCH																		
	4 PLACES	±---	±---																		
	3 PLACES	±---	±.005																		
2 PLACES	±0.13	±.01																			
1 PLACE	±0.25	±---																			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DRAWN BY JJ	DATE 1984/11/14	TITLE <b>FLANGED SPADE TERMINAL, AVIKRIMP -500 SERIES,</b>																	
		CHECKED BY	DATE	MOLEX INCORPORATED																	
		APPROVED BY	DATE	MATERIAL NO. <b>SEE CHART</b>	DOCUMENT NO. <b>SD-19125-001</b>	SHEET NO. <b>1 OF 1</b>															