


Number of contacts

# 9-50

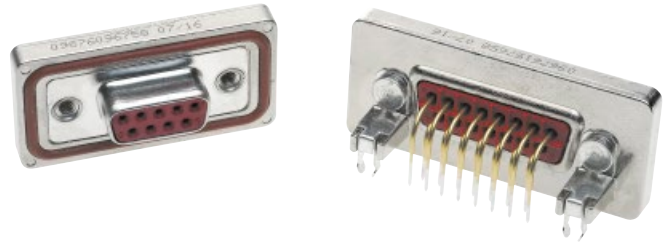

IP67, angled turned solder pins,  
with rear metal mounting plate, bracket and board lock

Identification	No. of contacts	Part number
<b>S4<sup>1)</sup></b>		
<p>Male connector metal shell with dimples</p> <p>Please insert digit for flange thread</p> <p>4-40 UNC ▶ 7 M3 ▶ 9</p>	<p>9 15 25 37 50</p>	<p>09 67 609 . 658 09 67 615 . 658 09 67 625 . 658 09 67 637 . 658 09 67 650 . 658</p>
<p>Female connector metal shell</p> <p>Please insert digit for flange thread</p> <p>4-40 UNC ▶ 6 M3 ▶ 8</p>	<p>9 15 25 37 50</p>	<p>09 67 609 . 758 09 67 615 . 758 09 67 625 . 758 09 67 637 . 758 09 67 650 . 758</p>

<sup>1)</sup> S4 = 0.76 µm (30 µinch) Au or PdNi equivalent