

## Device connector, rear mounting - RC-0000000H000 - 1592833

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Device connector, rear mounting, straight, Screw locking, M23, Axial O-ring, Central fastening M25 x 1.5, shielded: yes, panel thickness min.: 0.8 mm, panel thickness max.: 6.5 mm



### Key Commercial Data

Packing unit	24 STK
Minimum order quantity	24 STK
GTIN	
GTIN	4046356193016

### Technical data

#### General

Note	Order information: Order contact inserts separately
Type of locking	Screw locking
Pg housing screw connection	none
Mounting type	Central fastening M25 x 1.5

#### Ambient conditions

Ambient temperature	-20 °C ... 125 °C
Degree of protection	IP67

#### Material

Housing material	Turned parts: copper zinc alloy (CuZn), die-cast parts: zinc (GD-Zn)
Gasket and O-ring material	FPM

#### Specifications according to DIN EN 61984:2001

Installation height max.	2000 m
--------------------------	--------

#### Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50

# Device connector, rear mounting - RC-0000000H000 - 1592833


## Technical data

### Environmental Product Compliance


	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"
--	---

## Drawings


Diagram

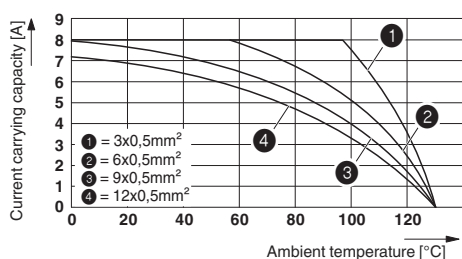


Diagram

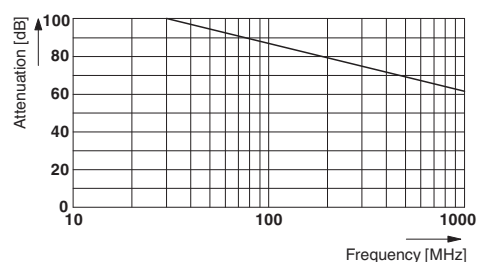

Dimensional drawing

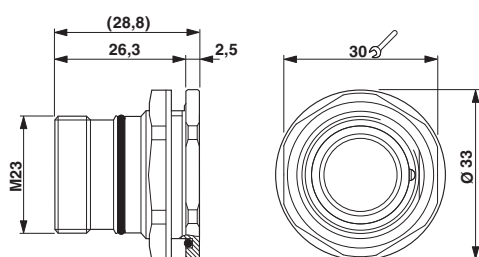

Dimensional drawing



Installation dimensions

## Approvals

### Approvals

Approvals

EAC

Ex Approvals

### Approval details

EAC		B.01742
-----	--	---------

Phoenix Contact 2018 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>