

Type 16P Series

Key Features

- Polymer Thick Film Element
- High Reliability
- Small Versatile Size
- All Plastic Body
- Plastic Spindle
- Flame Retardant



Specify the type 16P for applications where high insulation resistance and voltage proof are key requirements. The materials used in the all plastic body and spindle construction are UL approved making it an ideal component for domestic appliances and control systems where safety is of prime importance. This popular low cost potentiometer is suitable for industrial and professional applications.

Characteristics - Electrical

Resistance Range:	1K to 1M (Linear) 4K7 - 470K (Non-Linear)
Resistance Value:	1, 2.2 and 4.7 in each decade
Resistance Tolerance:	± 20% (10% by selection)
Rated Dissipation at 20°C:	0.25W (Linear), 0.125W (Non Linear)
Limiting Element Voltage:	350 V DC or AC RMS
Electrical Rotation:	240°
Terminal Resistance:	5 ohms, maximum
Noise (ENR):	2% maximum (Linear), 3% maximum (Non Linear)
Insulation Resistance:	4G Ohms, minimum
Voltage Proof:	1KV AC Peak

Characteristics - Mechanical


Operating Torque:	15mNm Maximum
Mechanical Rotation:	270° Nominal
End Stop Torque:	350mNm Maximum

Characteristics - Environmental

Limits of Resistance Change:	ΔR15% (after 1000 Hours Endurance)
Temperature Characteristics of Resistance:	5% (20°C to 70°C)
Bump Severity:	390m/s ² , 4000 Bumps
Vibration Severity:	10 - 500Hz, 0.75 mm or 98M/s ²
Climatic Category:	25/70/04
Mechanical Endurance:	15000 Operations (Minimum)


Type 16P Series

Dimensions

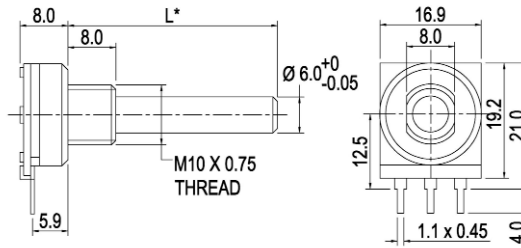


* For L Dimension, see Shaft Length in How to Order

PCB Layout



How to Order

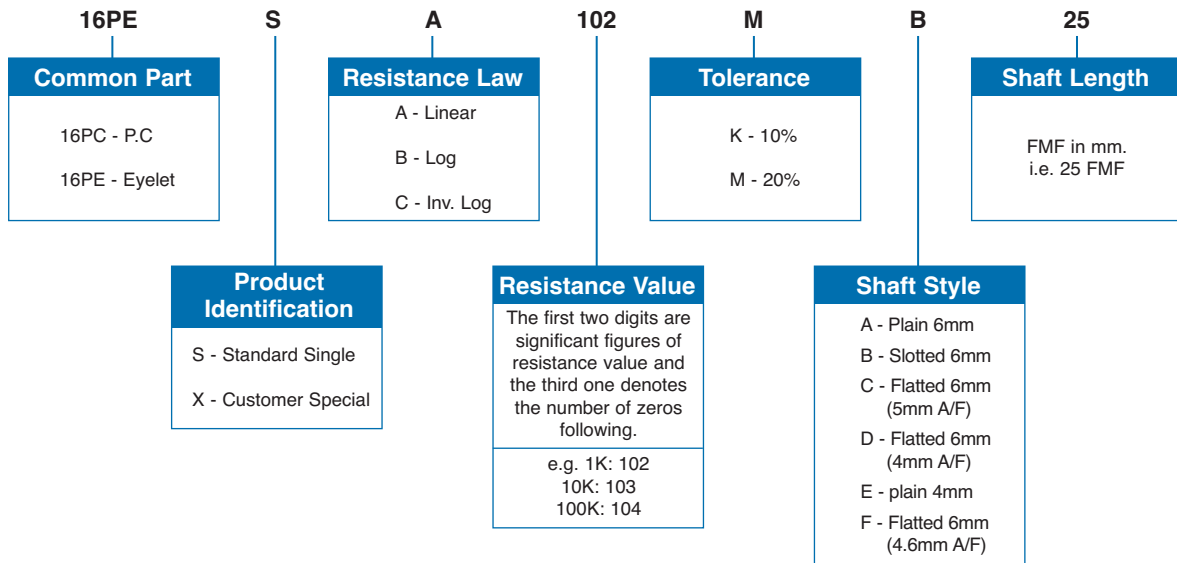

TE Connectivity, TE connectivity (logo) and TE (logo) are trademarks.
Other logos, product and Company names mentioned herein may be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this datasheet, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this datasheet are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.