



# INTERCONNECTS


## SERIES 800, 801, 802, 803 • .100" GRID SOLDER CUP HEADERS AND SOCKETS • SINGLE AND DOUBLE ROW STRIPS

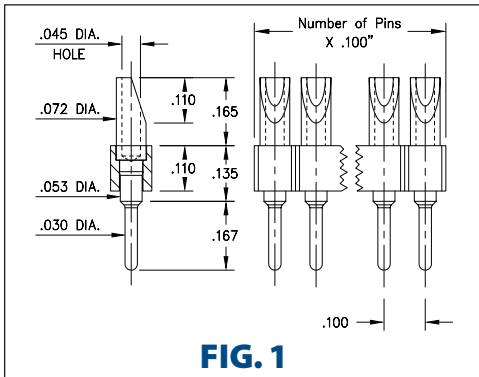


**FIG. 1**

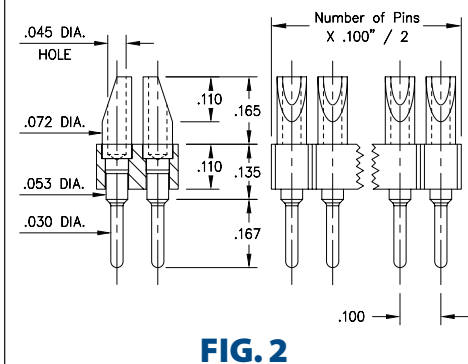

**FIG. 2**

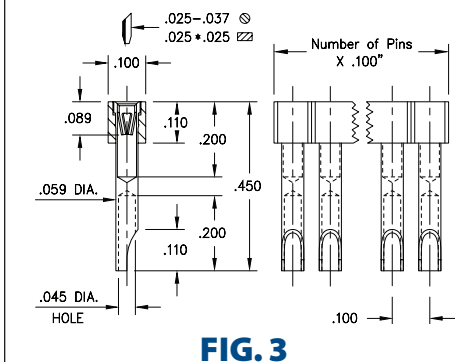


**FIG. 3**

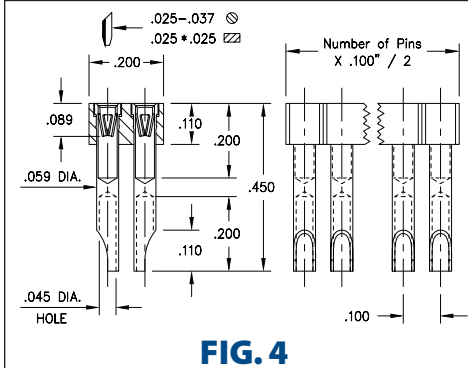





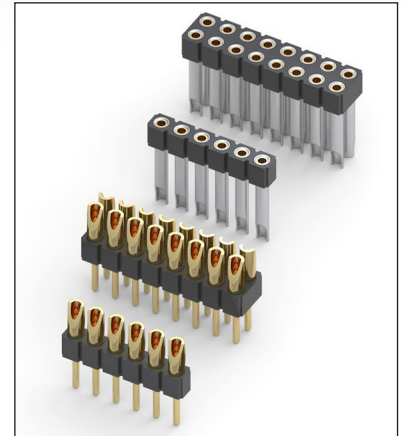







**FIG. 4**

- Series 800 and 802 use MM #1107 pins. See page 218 for details
- Series 801 and 803 use MM #1134 pin receptacles and accept pin diameters from .025"-.037" and .025" square pins. See page 177 for details
- Series 801 and 803 receptacles use Hi-Rel, 4-finger BeCu #47 contact rated at 4.5 amps. See page 256 for details
- Solder cups are pre-aligned and accept up to 20 AWG wire
- Insulators are high temperature thermoplastic, suitable for all soldering operations



### ORDERING INFORMATION

<b>FIG. 1</b>	<b>Series 800...007</b>	<b>Single Row Solder Cup / Solder Tail</b>	
	800-XX-0	-10-007000	02-64
Specify number of pins			
<b>FIG. 2</b>	<b>Series 802...007</b>	<b>Double Row Solder Cup / Solder Tail</b>	
	802-XX-0	-10-007000	02-64
Specify number of pins			
  			
<b>SPECIFY PLATING CODE XX=</b>		10 	40 
Pin Plating 		10 μ" Au	200 μ" Sn

<b>FIG. 3</b>	<b>Series 801...007</b>	<b>Single Row Solder Cup Sockets</b>	
	801-13-0	-10-007000	02-64
Specify number of pins			
<b>FIG. 4</b>	<b>Series 803...007</b>	<b>Double Row Solder Cup Sockets</b>	
	803-13-0	-10-007000	02-64
Specify number of pins			
  			
<b>SPECIFY PLATING CODE XX=</b>		13 	
Sleeve (Pin) 		10 μ" Au	
Contact (Clip) 		30 μ" Au	

