

1

2

3


4

5

6


7

2000±50

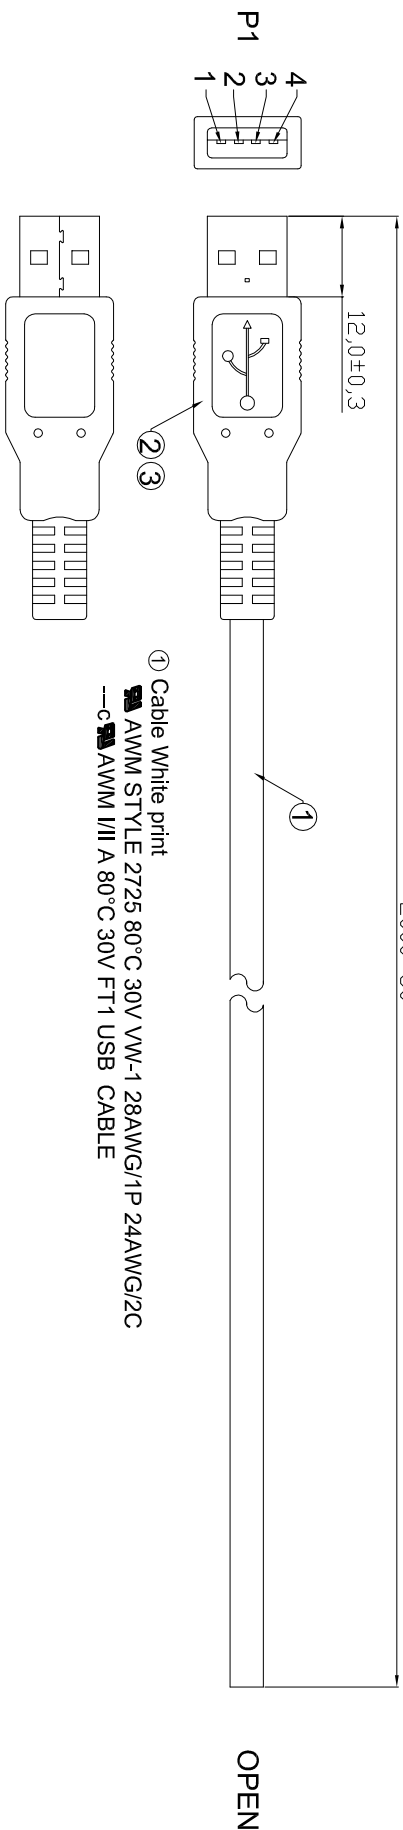


① Cable White print
AWM STYLE 2725 80°C 30V VW-1 28AWG/1P 24AWG/2C
---C AWM I/II A 80°C 30V FT1 USB CABLE

PE Bag Packing

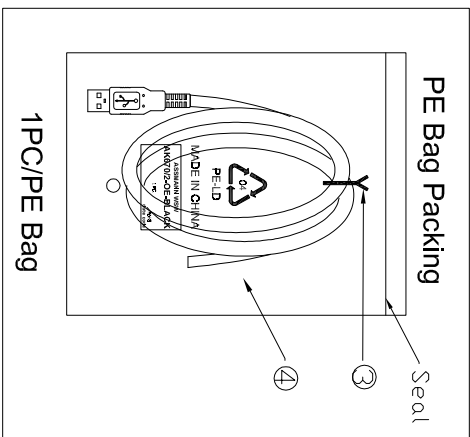

PIN ASSIGNMENT

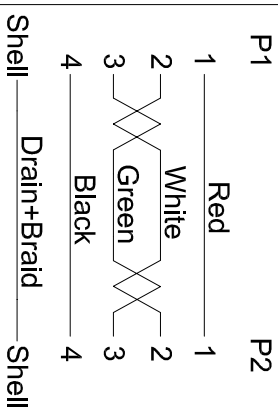

Electrical test:

1. 100% short, open, miss wire test
2. Conduct resistance: 2 Ohm max.
3. Insulator resistance: 5MΩ min.
4. Dielectric test: DC 300V

ROHS compliant

Unit: mm

⑤	PE Bag	1	Clear Print black "MADE IN CHINA" + "1PC"
④	TIE	1	Black
③	Out Jacket	NA	Black PVC-45P
②	CONN	1	USB A Male Shell:Nickel Pin:G/F Insulator color:White
①	Cable	1	USB2.0 UL2725 28#/1P+24#/2C+AEB OD:4.7mm Black

NO. NAME: QTY

SPECIFICATION

Scale	Free																		
TOLERANCE																			
DIM	TOL	①	Update the drawing	09.05.2016	Amy														
TOLERANCE		①	Drawn	10.12.2015	Joanna	Drawn	10.12.2015	Joanna											
TOLERANCE						Approved	09.05.2016	Amy											
TOLERANCE																			
TOLERANCE																			
TOLERANCE																			
TOLERANCE																			
TOLERANCE																			
TOLERANCE																			

Angle	TOL	Id.	Modification	Date	Name													

ASSMANN
 WSW components

Customer-No. ASSMANN WSW-No. **AK670/2-OE-BLACK**

Drawing-No. **ASS 7474 CA**

Replace **rev01** Sheet