


A
B
C
D
E
F
G
H

A
B
C
D
E
F
G
H

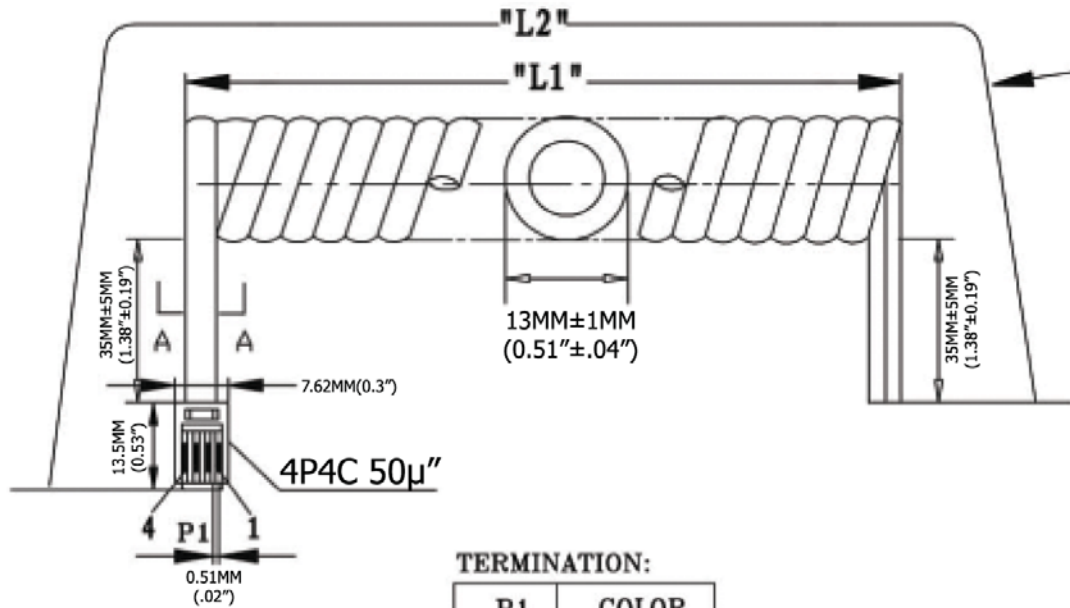


Extended length is with 500g of force

TERMINATION:

P1	COLOR
1	BLACK
2	RED
3	GREEN
4	YELLOW

Material:

- Plug Housing: Polycarbonate, clear
- Plug Terminal: 0.36"[0.14MM] Thick Phosphor Bronze
- Connector: 50µ" of Selective Gold Contact Plating
 - Area, Gold flash over the remainder
 - Over 2.54µm[.000100] thick nickel underplate
- Conductor(X4C): 26AWG (0.12X12) Bare Copper
- Insulation(X4C): PP6331 ID 0.95-1.0
- Jacke: PVC No UL 80 P
- Package: Individual PE Bag

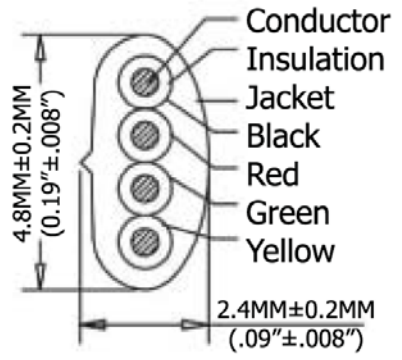

Extended Length ("L2")	Typical Retracted Length ("L1")
168.0 Inches - 193.2 Inches	33.5 Inches
4,267.2MM-4,907.28MM	850.9MM

SEC:A-A

Scale	1:1						Name	Item No.
TOLERANCE							Drawn	11.02.11
X.X	±0.40						Chappell	AT-C-26-4/4/B-14-OE Title NON-UL 26AWG (0.12X12)*4C, O.D.: 2.4*4.8MM, Single Plug, 50µ" of contact plating, BLACK
X.XX	±0.25						Approved	
X.XXX	±0.15							
Angle	±3°							
								Drawing No.
								Replace
								Sheet

