

#### Is Now Part of



# ON Semiconductor®

To learn more about ON Semiconductor, please visit our website at <a href="https://www.onsemi.com">www.onsemi.com</a>

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA Class 3 medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, emplo



May 2003 Revised March 2004

### NC7SV11

## TinyLogic® ULP-A 3-Input AND Gate

#### **General Description**

The NC7SV11 is a single 3-Input AND Gate from Fairchild's Ultra Low Power-A (ULP-A) series of TinyLogic®. ULP-A is ideal for applications that require extreme high speed, high drive and low power. This product is designed for a wide low voltage operating range (0.9V to 3.6V)  $V_{CC}$  and applications that require more drive and speed than the TinyLogic ULP series, but still offer best in class low power operation.

The NC7SV11 is uniquely designed for optimized power and speed, and is fabricated with an advanced CMOS technology to achieve high-speed operation while maintaining low CMOS power dissipation.

#### **Features**

- 0.9V to 3.6V V<sub>CC</sub> supply operation
- 3.6V overvoltage tolerant I/O's at V<sub>CC</sub> from 0.9V to 3.6V
- Extremely High Speed tpD

2.8 ns typ for 2.7V to 3.6V  $V_{CC}$ 

3.0 ns typ for 2.3V to 2.7V  $V_{CC}$ 

5.0 ns typ for 1.65V to 1.95V  $V_{CC}$ 

6.9 ns typ for 1.4V to 1.6V  $V_{CC}$ 

9.9 ns typ for 1.1V to 1.3V  $\ensuremath{\text{V}_{\text{CC}}}$ 

12 ns typ for 0.9V  $V_{\rm CC}$ 

- Power-Off high impedance inputs and outputs
- High Static Drive (I<sub>OH</sub>/I<sub>OL</sub>)

±24 mA @ 3.00V V<sub>CC</sub>

±18 mA @ 2.30V V<sub>CC</sub>

±6 mA @ 1.65V V<sub>CC</sub>

±4 mA @ 1.4V V<sub>CC</sub>

 $\pm 2$  mA @ 1.1V V<sub>CC</sub>


 $\pm 0.1~\text{mA}~$  @ 0.9V  $V_{CC}$ 

- Uses patented Quiet Series<sup>™</sup> noise/EMI reduction circuitry
- Ultra small MicroPak™ leadfree package
- Ultra low dynamic power

### **Ordering Code:**

Order Number	Package Number	Product Code Top Mark	Package Description	Supplied As
NC7SV11P6X	MAA06A	V11	6-Lead SC70, EIAJ SC88, 1.25mm Wide	3k Units on Tape and Reel
NC7SV11L6X	MAC06A	AT	6-Lead MicroPak, 1.0mm Wide	5k Units on Tape and Reel

### Battery Life vs. V<sub>CC</sub> Supply Voltage



TinyLogic ULP and ULP-A with up to 50% less power consumption can extend your battery life significantly.

Battery Life = (V<sub>battery</sub> \*I<sub>battery</sub>\*.9)/(P<sub>device</sub>)/24hrs/day


Where,  $P_{device} = (I_{CC} * V_{CC}) + (C_{PD} + C_L) * V_{CC}^2 * f$ 

Assumes ideal 3.6V Lithium Ion battery with current rating of 900mAH and derated 90% and device frequency at 10MHz, with  $C_L$  = 15 pF load

TinyLogic® is a registered trademark of Fairchild Semiconductor Corporation.

MicroPak™ and Quiet Series™ are trademarks of Fairchild Semiconductor Corporation.

## **Logic Symbol**



## **Pin Descriptions**

Pin Names	Description
A, B, C	Inputs
Y	Output

### **Function Table**


$$\boldsymbol{Y} = \boldsymbol{A}\boldsymbol{B}\boldsymbol{C}$$

	Output		
Α	В	С	Y
Х	Х	L	L
Х	L	X	L
L	X	X	L
Н	Н	Н	Н


H = HIGH Logic Level L = LOW Logic Level X = Either LOW or HIGH Logic Level

## **Connection Diagrams**

Pin Assignment for SC70




#### Pin One Orientation Diagram



AAA represents Product Code Top Mark - see ordering code. **Note:** Orientation of Top Mark determines Pin One location. Read the Top Product Code Mark left to right, Pin One is the lower left pin (see diagram).

#### Pad Assignments for MicroPak



(Top Thru View)

±24 mA

### **Absolute Maximum Ratings**(Note 1)

# Supply Voltage ( $V_{CC}$ ) -0.5V to +4.6V DC Input Voltage ( $V_{IN}$ ) -0.5V to +4.6V S

DC Output Voltage ( $V_{OUT}$ ) HIGH or LOW State (Note 2) -0.5V to  $V_{CC}$  +0.5V

 $V_{CC} = 0V \\ DC \ Input \ Diode \ Current \ (I_{IK}) \ V_{IN} < 0V \\ \pm 50 \ mA$ 

DC Output Diode Current  $(I_{OK})$ 

 $\begin{array}{lll} \rm V_{OUT} < 0V & -50 \; mA \\ & \rm V_{OUT} > V_{CC} & +50 \; mA \\ & \rm DC \; Output \; Source/Sink \; Current \; (I_{OH}/I_{OL}) & \pm \; 50 \; mA \\ \end{array}$ 

DC  $V_{CC}$  or Ground Current per

Supply Pin (I<sub>CC</sub> or Ground)  $\pm$  50 mA Storage Temperature Range (T<sub>STG</sub>)  $-65^{\circ}$ C to +150 $^{\circ}$ C

# Recommended Operating Conditions (Note 3)

Supply Voltage 0.9V to 3.6V Input Voltage  $(V_{IN})$  0V to 3.6V

Output Voltage (V<sub>OUT</sub>)

 $V_{CC} = 0.0V$  0V to 3.6V HIGH or LOW State 0V to  $V_{CC}$ 

Output Current in  $I_{OH}/I_{OL}$  $V_{CC} = 3.0 \text{V to } 3.6 \text{V}$ 

 $\begin{array}{lll} \mbox{V}_{CC} = 2.3 \mbox{V to } 2.7 \mbox{V} & \pm 18 \mbox{ mA} \\ \mbox{V}_{CC} = 1.65 \mbox{V to } 1.95 \mbox{V} & \pm 6 \mbox{ mA} \\ \mbox{V}_{CC} = 1.4 \mbox{V to } 1.6 \mbox{V} & \pm 4 \mbox{ mA} \\ \mbox{V}_{CC} = 1.1 \mbox{V to } 1.3 \mbox{V} & \pm 2 \mbox{ mA} \\ \end{array}$ 

 $V_{CC} = 0.9V \\ \mbox{$\pm 0.1$ mA} \\ \mbox{Free Air Operating Temperature ($T_A$)} \\ \mbox{$-40^{\circ}$C to $+85^{\circ}$C} \\ \mbox{}$ 

Minimum Input Edge Rate (Δt/ΔV)

 $V_{IN} = 0.8V$  to 2.0V,  $V_{CC} = 3.0V$  10 ns/V

Note 1: Absolute Maximum Ratings: are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the Electrical Characteristics tables are not guaranteed at the absolute maximum ratings. The "Recommended Operating Conditions" table will define the conditions for actual device operation.

Note 2: IO Absolute Maximum Rating must be observed.

Note 3: Unused inputs must be held HIGH or LOW. They may not float.

### **DC Electrical Characteristics**

Symbol	Parameter	V <sub>CC</sub>	<b>T</b> <sub>A</sub> = -	+25°C	$T_A = -40^{\circ}C \text{ to } +85^{\circ}C$		Units	Conditions
Syllibol		(V)	Min	Max	Min	Max	Units	Conditions
V <sub>IH</sub>	HIGH Level	0.90	0.65 x V <sub>CC</sub>		0.65 x V <sub>CC</sub>			
	Input Voltage	$1.10 \le V_{CC} \le 1.30$	0.65 x V <sub>CC</sub>		0.65 x V <sub>CC</sub>			
		$1.40 \le V_{CC} \le 1.60$	0.65 x V <sub>CC</sub>		0.65 x V <sub>CC</sub>		V	
		$1.65 \leq V_{CC} \leq 1.95$	0.65 x V <sub>CC</sub>		0.65 x V <sub>CC</sub>		· ·	
		$2.30 \leq V_{CC} < 2.70$	1.6		1.6			
		$2.70 \leq V_{CC} \leq 3.60$	2.0		2.0			
V <sub>IL</sub>	LOW Level	0.90		0.35 x V <sub>CC</sub>		0.35 x V <sub>CC</sub>		
	Input Voltage	$1.10 \le V_{CC} \le 1.30$		$0.35 \times V_{\rm CC}$		$0.35 \times V_{\rm CC}$		
		$1.40 \le V_{CC} \le 1.60$		$0.35 \times V_{\rm CC}$		$0.35 \times V_{\rm CC}$	V	
		$1.65 \le V_{CC} \le 1.95$		$0.35 \times V_{\rm CC}$		$0.35 \times V_{\rm CC}$	·	
		$2.30 \leq V_{CC} < 2.70$		0.7		0.7		
		$2.70 \leq V_{CC} \leq 3.60$		0.8		8.0		
V <sub>OH</sub>	HIGH Level	0.90	V <sub>CC</sub> - 0.1		V <sub>CC</sub> - 0.1			
	Output Voltage	$1.10 \le V_{CC} \le 1.30$	V <sub>CC</sub> - 0.1		V <sub>CC</sub> - 0.1			
		$1.40 \le V_{CC} \le 1.60$	V <sub>CC</sub> – 0.2		V <sub>CC</sub> – 0.2			I <sub>OH</sub> = -100 μA
		$1.65 \le V_{CC} \le 1.95$	V <sub>CC</sub> - 0.2		V <sub>CC</sub> - 0.2			ΙΟΗ = -100 μΑ
		$2.30 \le V_{CC} < 2.70$	V <sub>CC</sub> – 0.2		V <sub>CC</sub> – 0.2			
		$2.70 \leq V_{CC} \leq 3.60$	V <sub>CC</sub> - 0.2		V <sub>CC</sub> - 0.2			
		$1.10 \le V_{CC} \le 1.30$	0.75 x V <sub>CC</sub>		0.75 x V <sub>CC</sub>			$I_{OH} = -2 \text{ mA}$
		$1.40 \le V_{CC} \le 1.60$	0.75 x V <sub>CC</sub>		0.75 x V <sub>CC</sub>		V	$I_{OH} = -4 \text{ mA}$
		$1.65 \le V_{CC} \le 1.95$	1.25		1.25			I <sub>OH</sub> = -6 mA
		$2.30 \le V_{CC} < 2.70$	2.0		2.0			IOH - O IIIV
		$2.30 \le V_{CC} < 2.70$	1.8		1.8			I <sub>OH</sub> = -12 mA
		$2.70 \le V_{CC} \le 3.60$	2.2		2.2			.Он
		$2.30 \le V_{CC} < 2.70$	1.7		1.7			I <sub>OH</sub> = -18 mA
		$2.70 \leq V_{CC} \leq 3.60$	2.4		2.4			
i		$2.70 \le V_{CC} \le 3.60$	2.2		2.2			$I_{OH} = -24 \text{ mA}$

# DC Electrical Characteristics (Continued)

Symbol	Parameter	V <sub>CC</sub>	T <sub>A</sub> =	+25°C	$T_A = -40^{\circ}C \text{ to } +85^{\circ}C$		Units	Conditions
Symbol	Farameter	(V)	Min	Max	Min	Max	Units	Conditions
V <sub>OL</sub>	LOW Level	0.90		0.1		0.1		
	Output Voltage	$1.10 \le V_{CC} \le 1.30$		0.1		0.1		
		$1.40 \le V_{CC} \le 1.60$		0.2		0.2		I - 100 ··· A
		$1.65 \le V_{CC} \le 1.95$		0.2		0.2		$I_{OL} = 100  \mu A$
		$2.30 \le V_{CC} < 2.70$		0.2		0.2		
		$2.70 \leq V_{CC} \leq 3.60$		0.2		0.2		
		$1.10 \le V_{CC} \le 1.30$		0.25 x V <sub>CC</sub>		0.25 x V <sub>CC</sub>	V	I <sub>OL</sub> = 2 mA
		$1.40 \le V_{CC} \le 1.60$		0.25 x V <sub>CC</sub>		0.25 x V <sub>CC</sub>	v	I <sub>OL</sub> = 4 mA
		$1.65 \le V_{CC} \le 1.95$		0.3		0.3		I <sub>OL</sub> = 6 mA
		$2.30 \le V_{CC} < 2.70$		0.4		0.4		I <sub>OL</sub> = 12 mA
		$2.70 \leq V_{CC} \leq 3.60$		0.4		0.4		IOL = 12 IIIA
		$2.30 \le V_{CC} < 2.70$		0.6		0.6		I <sub>OL</sub> = 18 mA
		$2.70 \leq V_{CC} \leq 3.60$		0.4		0.4		10L = 10 IIIA
		$2.70 \le V_{CC} \le 3.60$		0.55		0.55		I <sub>OL</sub> = 24 mA
I <sub>IN</sub>	Input Leakage Current	0.90 to 3.60		±0.1		±0.5	μΑ	$0 \le V_I \le 3.6V$
I <sub>OFF</sub>	Power Off Leakage Current	0		0.5		0.5	μΑ	$0 \le (V_I, V_O) \le 3.6V$
I <sub>CC</sub>	Quiescent Supply Current	0.90 to 3.60		0.9		0.9	μА	$V_I = V_{CC}$ or GND
		0.90 to 3.60				±0.9	μΛ	$V_{CC} \le V_I \le 3.6V$

## **AC Electrical Characteristics**

Symbol	Parameter	v <sub>cc</sub>	$T_A = +25^{\circ}C$		$T_A = -40^{\circ}C \text{ to } +85^{\circ}C$		Units	Conditions	Figure	
Symbol	Farameter	(V)	Min	Тур	Max	Min	Max	Units	Conditions	Number
t <sub>PHL</sub>	Propagation Delay	0.90		12					$C_L = 15 \text{ pF}, R_L = 1 \text{ M}\Omega$	
t <sub>PLH</sub>		$1.10 \le V_{CC} \le 1.30$	2.0	9.9	17.0	1.0	19.2		C = 15 pE B = 2 kO	
		$1.40 \leq V_{CC} \leq 1.60$	1.0	6.9	10.2	0.9	12.0	ns	$C_L = 15 \text{ pF}, R_L = 2 \text{ k}\Omega$	Figures
		$1.65 \le V_{CC} \le 1.95$	1.0	5.0	7.8	0.7	9.2	115	C <sub>L</sub> = 30 pF	1, 2
		$2.30 \leq V_{CC} < 2.70$	0.8	3.0	5.2	0.6	5.9		$R_L = 500 \text{ k}\Omega$	
		$2.70 \leq V_{CC} \leq 3.60$	0.7	2.8	4.5	0.5	4.8			
C <sub>IN</sub>	Input Capacitance	0		2.0				pF		
C <sub>OUT</sub>	Output Capacitance	0		4.5				pF		
C <sub>PD</sub>	Power Dissipation	0.90 to 3.60		9.0				pF	$V_I = 0V \text{ or } V_{CC}$	
	Capacitance	0.90 to 3.60	8.0					þг	f = 10 MHz	

# **AC Loading and Waveforms**




FIGURE 1. AC Test Circuit

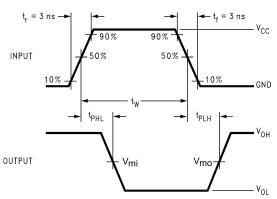


FIGURE 2. AC Waveforms


Symbol		V <sub>CC</sub>							
,z	$\textbf{3.3V} \pm \textbf{0.3V}$	$2.5V \pm 0.2V$	1.8V ± 0.15V	1.5V ± 0.10V	1.2V ± 0.10V	0.9V			
V <sub>mi</sub>	1.5V	V <sub>CC</sub> /2							
V <sub>mo</sub>	1.5V	V <sub>CC</sub> /2							


# **Tape and Reel Specification**

### TAPE FORMAT for SC70

174 E 1 O 148 / 1 1 1 1 0 0 0 1 0									
Package	Таре	Number	Cavity	Cover Tape					
Designator	Section	Cavities	Status	Status					
	Leader (Start End)	125 (typ)	Empty	Sealed					
P6X	Carrier	3000	Filled	Sealed					
	Trailer (Hub End)	75 (typ)	Empty	Sealed					

#### TAPE DIMENSIONS inches (millimeters)

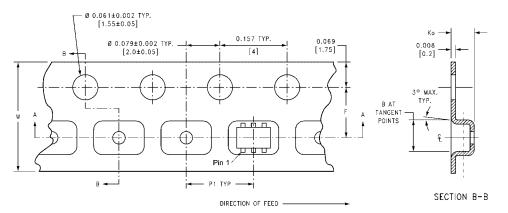

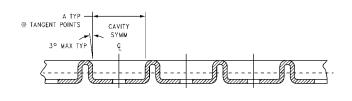

SECTION A-A

R 1.181 MIN.
[30]

BEND RADIUS NOT TO SCALE

#### Tape and Reel Specification (Continued) TAPE FORMAT for MicroPak Package Tape Number Cavity Cover Tape Status Designator Section Cavities Status Leader (Start End) Sealed 125 (typ) Empty L6X Carrier 5000 Filled Sealed Trailer (Hub End) 75 (typ) **Empty** Sealed TAPE DIMENSIONS inches (millimeters) 1.75±0.10 4.00 3.50±0.05 8.00 +0.30 -0.10 -ø 0.50 ±0.05 SECTION B-B DIRECTION OF FEED SCALE:10X 0.254±0.020 C 0.70±0.05 5° MAX SECTION A-A SCALE:10X **REEL DIMENSIONS** inches (millimeters) TAPE SLOT DETAIL X DETAIL X SCALE: 3X Tape В С D N W1 W2 Size 7.0 0.059 0.512 0.795 2.165 0.331 + 0.059/-0.000 0.567 W1 + 0.078/-0.039 8 mm (177.8) (55.00)(8.40 + 1.50 / -0.00)(W1 + 2.00/-1.00)(1.50)(13.00)(20.20)(14.40)

# Physical Dimensions inches (millimeters) unless otherwise noted 0.65 B 1.25±0.10 2.10±0.10 0.20 +0.10 LAND PATTERN RECOMMENDATION ◆ max 0.1 **②** SEE DETAIL A 0.9±.10 0.95±0.15 max 0.1 R0.14 GAGE PLANE R0.10 0.20 0.45 0.10 -- 0.425 NOMINAL

#### NOTES:


- A. CONFORMS TO EIAJ REGISTERED OUTLINE DRAWING SC88.
- B. DIMENSIONS DO NOT INCLUDE BURRS OR MOLD FLASH.
- C. DIMENSIONS ARE IN MILLIMETERS.

MAA06ARevC

DETAIL A

6-Lead SC70, EIAJ SC88, 1.25mm Wide Package Number MAA06A

### Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

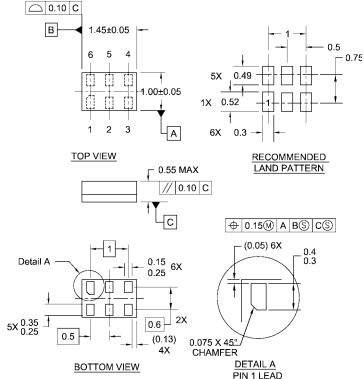

#### Notes:

- 1. JEDEC PACKAGE REGISTRATION IS ANTICIPATED 2. DIMENSIONS ARE IN MILLIMETERS
- 3. DRAWING CONFORMS TO ASME Y14.5M-1994

MAC06ARevB

6-Lead MicroPak, 1.0mm Wide Package Number MAC06A

Fairchild does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and Fairchild reserves the right at any time without notice to change said circuitry and specifications.

#### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

- 1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
- 2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

www.fairchildsemi.com

ON Semiconductor and in are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdt/Patent-Marking.pdf">www.onsemi.com/site/pdt/Patent-Marking.pdf</a>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and exp

#### **PUBLICATION ORDERING INFORMATION**

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800-282-9855 Toll Free USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81-3-5817-1050

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative