PDUMV30

Metered Rackmount PDU

A (BANK 2)







24 Outlets



30A Max Capacity





2 Load Meters

B (BANK 2)



0U Rackmount




Toolless Mounting Buttons

- A Digital Load Meters
- B 5-15/20R Outlets
- 20A Circuit Breakers
- Removable Cord **Retention Brackets**
- **E** Removable Mounting **Brackets**
- **Buttons**
- **G** 10 ft. Input Power Cord **H** L5-30P Twist-Lock
- Input Plug

F Toolless Mounting


Durable Metal Case


Certifications



AC Input Connection: Insert L5-30P twist-lock plug into compatible L5-30R utility, generator or UPS outlet.

B (BANK 1)





C (BANK 2) Also Includes: Cable Ties, Owner's Manual C (BANK 1)

Tested to UL 60950-1 (US & Canada), NOM (Mexico)

Note: Installed 17.67 mm toolless mounting buttons can be replaced with included 14.17 mm buttons for additional compatibility.



- Displays total load for each outlet bank in real time
- Perfect for rackmount server, network and telecom applications


SEE NEXT PAGE FOR DETAILED UNIT MEASUREMENTS





1111 W. 35th Street Chicago, IL 60609 USA 773.869.1234 www.tripplite.com


Specifications	ROHS	•
Model	PDUMV30	
Voltage	100-125V	_
Frequency	50/60 Hz	_
Maximum Capacity	30A	_
Agency-Derated Capacity	24A	_
Input Connector	L5-30P	
Cord Length	10 ft.	_
Outlets	24 (5-15/20R)	_
Primary Mounting Option	0U (Vertical) Rackmount	
Unit Weight & Dimensions	8.0 lb / 3.75 x 63.75 x 2.25 in.	_
	See next page for detailed unit measurements.	


Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.

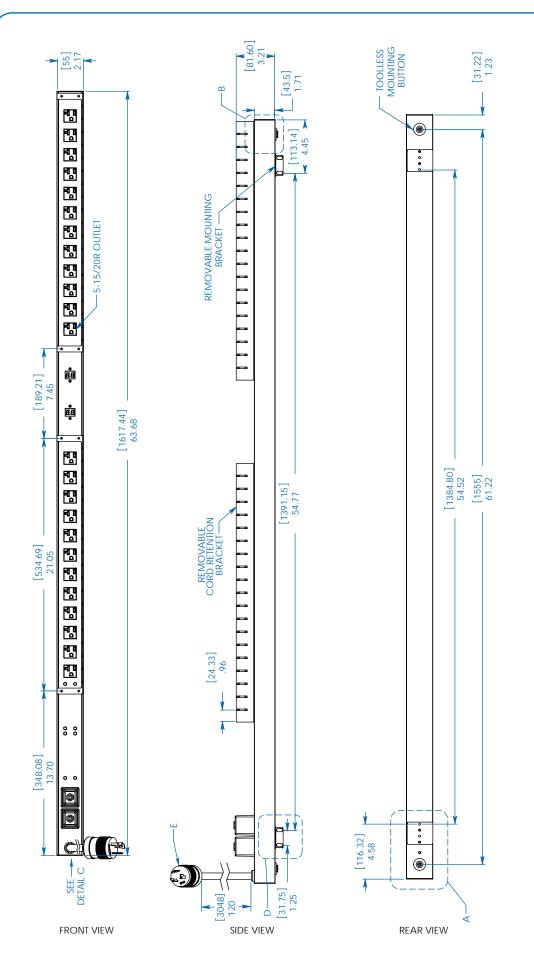












MODEL: PDUMV30



1111 W. 35th Street Chicago, IL 60609 USA 773.869.1234 www.tripplite.com

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.