
PB-103M

2390 TIE-POINT, EXTERNALLY POWERED SOLDERLESS BREADBOARD

Applications

The PB-103M Externally Powered Solderless Breadboard is a great way to prototype low frequency or DC powered circuits. It is ideal for:

- Educational labs
- Hobbyists

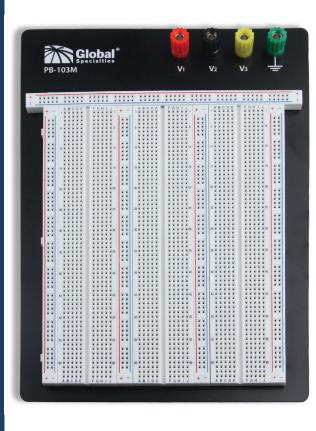

Features

- Comes fully assembled
- Externally powered
- 2390 Tie-points
- 4 Binding posts
- 19 mm standard spaced binding posts
- ABS plastic body
- Square hole style
- Nickel plated phosphor bronze spring clip contacts
- Aluminum back plate
- Rubber feet
- Fits 0.4-0.7 mm wire diameter
- Fits 21 total 16-pin ICs
- Measures 17.5 x 23 x 2.7 cm
- Weighs 460 g
- Maximum current capacity of 1.5 A at 36 V
- RoHS compliant
- Three-year warranty

